




KONICA MINOLTA

AccurioPrint
C4065

BUILD YOUR BRIDGE TO SUCCESS

ACCURIOPRINT C4065

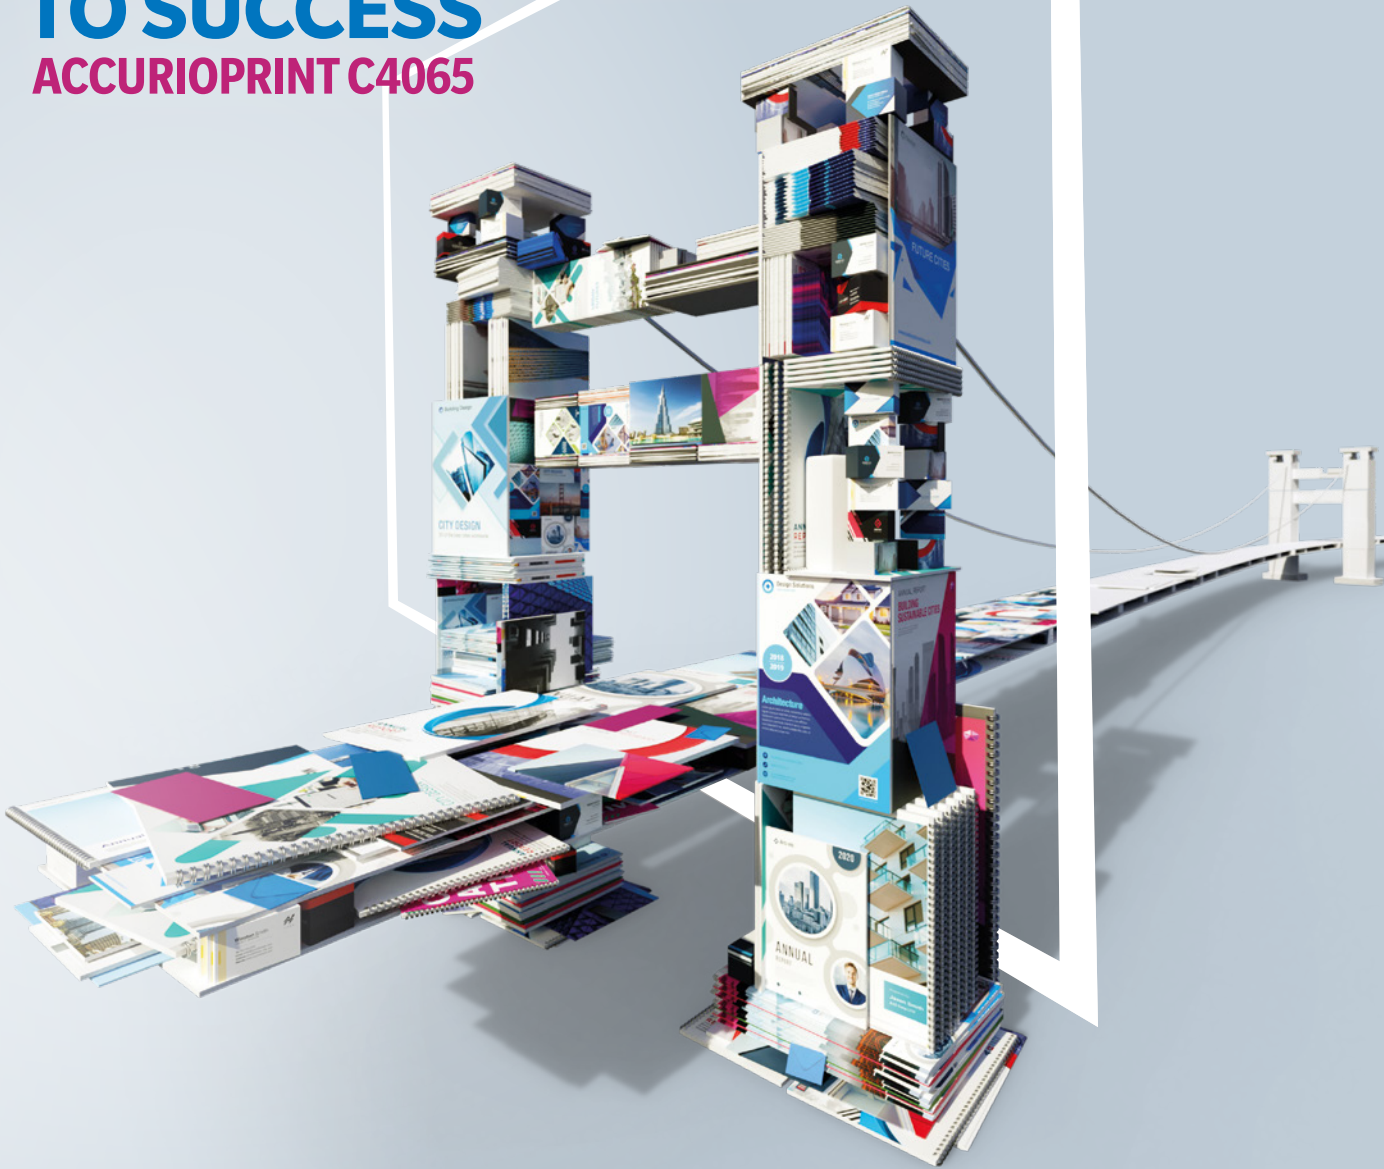

RETHINK VERSATILITY

Introducing the AccurioPrint C4065 – the incredibly versatile digital print system that connects you with success. The outstanding image and colour quality, media versatility, and fast 66 (A4) colour ppm or 81 black and white ppm output make this press a high-value, yet cost-effective solution for print professionals.

ACCURIOPRINT C4065 SPECIFICATIONS

RETHINK OPTIONS

SYSTEM SPECIFICATIONS

Resolution	3,600 (equivalent) x 2,400 dpi x 8 bit
Paper weight	62 – 360 gsm
Paper sizes	330 x 488 mm 330 x 864 mm (max. duplex) 330 x 1300 mm (max. duplex)
Paper input	Max.: 7,380 sheets
Dimension (WxDxH)	800 mm x 852 mm x 1080 mm
Unit weight	316 kgs

PRODUCTIVITY

AccurioPrint C4065

A4 – max. per minute	66 ppm
A3 – max. per minute	37 ppm
SRA3 – max. per minute	34 ppm

KONICA MINOLTA IMAGE CONTROLLER IC-607

Architecture	Internal
OS	Linux
CPU	Intel Pentium C4400
Clock speed	3.3 GHz
RAM std	16 GB
HDD	2 TB (2 x 1TB)
Page-description language	Adobe® PostScript® 3; PDF v1.7; TIFF (v6); PPML v2.2
Applicable OS	Windows 8.1/10; Windows Server 2012/R2/2016/2019; Mac OS X 10.11–14

FIERY IMAGE CONTROLLER IC-419

Architecture	Internal
OS	Linux
CPU	Intel® Pentium® Processor G4400
Clock speed	3.3 GHz
RAM std	8 GB
HDD	500 GB
Page-description language	Adobe® PostScript® Levels 1, 2, 3, APPE 5, Microsoft Office document formats: doc, docx, xls,xlsx, ppt, pptx, pub (via Hot Folders)
Applicable OS	Windows 8.1/10; Windows Server 2012/R2/2016/2019; Mac OS X 10.11–14

CREO CONTROLLER IC-316E

Architecture	External
OS	Windows 10 IOT LTSC
CPU	Intel Core i7-8700
Clock speed	4.6 GHz
RAM	20 GB Total
HDD	4 x 2 TB
Page-description language	Adobe® PostScript® Levels 1, 2, 3, Adobe PDF (versions 1.3 through 1.7, PDFX-1a,3 and 4), EPS, Creo VPS, PPML, PPML.zip, PPML/VDX, PDF/VT—PDF/VT1 and PDF/VT2, JDF/JMF, XPS, AFP—part of the Trans Pack, JPEG, TIFF—supports TIFF 6.0 files saved with sliced internal data
Applicable OS	Windows 7/ 8.1, Windows 10, Windows Server 2012 / 2016/2019, Mac OS 10.2-10.15/11

OPTIONS

KM Image Controller	IC-607
EFI internal Controller	IC-419
Creo Controller	IC-316e
Paper Feeding Unit	PF-602m
Dehumidifier heater	HT-504
Paper feeding unit	PF-707m
Dehumidifier heater	HT-506
PFU connection Kit	FA-502
Large capacity feeding unit	LU-202m
Dehumidifier heater for LU	HT-503
Envelope printing guide for LU	MK-746
Large capacity feeding unit (banner)	LU-202Xlm
Multi bypass feeding	MB-508
Banner Paper Feeder kit	MK-760
Multi bypass tray	MB-509
Intelligent Media Sensor	IM-101
Output Tray	OT-511
Stapling Unit	FS-532m
Saddle Sticher Kit	SD-510
Punch Kit	PK-525
Post Inserter Kit	PI-502
Output Tray Unit	OT-512
Long Sheet Kit (Output)	MK-761
Intelligent Quality Optimiser	IQ-501

DF-713 — DUAL SCAN DOCUMENT FEEDER (OPTION)

Tray Capacity	300 sheets (80 gsm)		
Original Weight Duplex	50 – 210 gsm		
Detectable Document Size	Min: 100 x 140 mm Max: 297 x 432 mm		
Scan Speed by Resolution	200 dpi	Colour: Simplex 140 ipm Monochrome: Simplex 140 ipm	Duplex 280 ipm Duplex 280 ipm
Scan Speed by Resolution	300 dpi	Colour: Simplex 120 ipm Monochrome: Simplex 120 ipm	Duplex 240 ipm Duplex 240 ipm
Scan Speed by Resolution	400 dpi	Colour: Simplex 100 ipm Monochrome: Simplex 100 ipm	Duplex 200 ipm Duplex 200 ipm
Copy Speed	600 dpi	Colour: Simplex 75 ipm Monochrome: Simplex 80 ipm	Duplex 150 ipm Duplex 160 ipm

–All specifications refer to A4-size paper of 80 gsm quality.

–The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.

–The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.

–Some of the product illustrations contain optional accessories.

–Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.

–Konica Minolta does not warrant that any prices or specifications mentioned will be error-free.

–All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

Ecology & Environment

KONICA MINOLTA copiers and multi-functional products are designed with the environment in mind.

- RoHS Compliance
- Eco-conscious Toners
- WEEE Compliance
- Production at ISO Certified Factories



Requirements for safe use.

- Please read and follow the instruction manual to ensure safe operation.
- Only operate using appropriate power supply and voltage.
- Connecting the earth wire to an inappropriate place may cause explosion or electric shock. Please connect accordingly (Taiwan and the Philippines only)

Product appearance, configuration and/or specificants are subject to change without notice.

The Konica Minolta logo and the symbol mark, are registered trademarks or trademarks of Konica Minolta Holdings, Inc. bizhub, PageScope, Simitri and the Emperon logo are registered trademarks or trademarks of KONICA MINOLTA BUSINESS TECHNOLOGIES, INC. Windows is registered trademark of Microsoft Corporation in the United States and other countries. Adobe and PostScript are registered trademarks or trademarks of Adobe Systems Incorporated. All other brand and product names are registered trademarks or trademarks of their respective owners.

Printed on an AccurioPress C14000.

Konica Minolta
Business Solutions New Zealand Ltd

Free Call 0800 475 005
konicaminolta.co.nz/home